




KEY FEATURES

- High pressure construction
- Endless rotation
- High torque
- Optimized positioning performance
- Steel flange for increased durability
- Ultra compact design

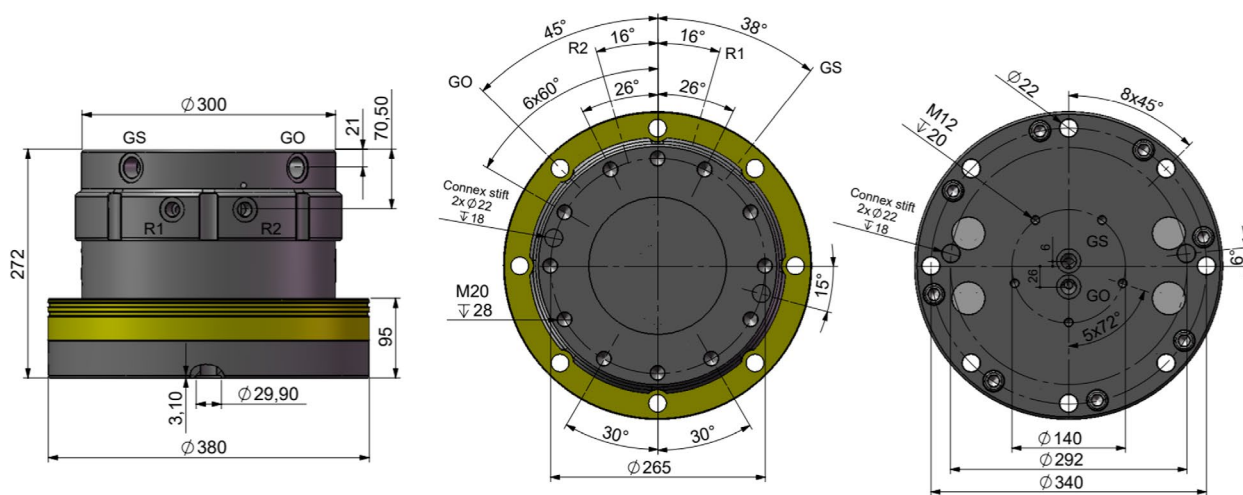

MODEL SPECIFICATIONS



RMR 16 C

164

38

320

25

360°

3800

1/2"3/4"

32

20